

NITROCARB™
VACUUM-TIGHT OXYGEN SENSOR FOR
NITROCARBURIZING PROCESSES




CONSTRUCTION

- Ventilated sheath
- Solid Zirconia electrolyte
- Vacuum-tight, sealed head
- High temperature alloy sheath
- All stainless steel connection fittings

APPLICATIONS

- Capable of measurement and control of nitrocarburizing atmospheres when used in conjunction with H2Smart™ hydrogen analyzer
- Measurement and control of pre- and post-oxidation processes

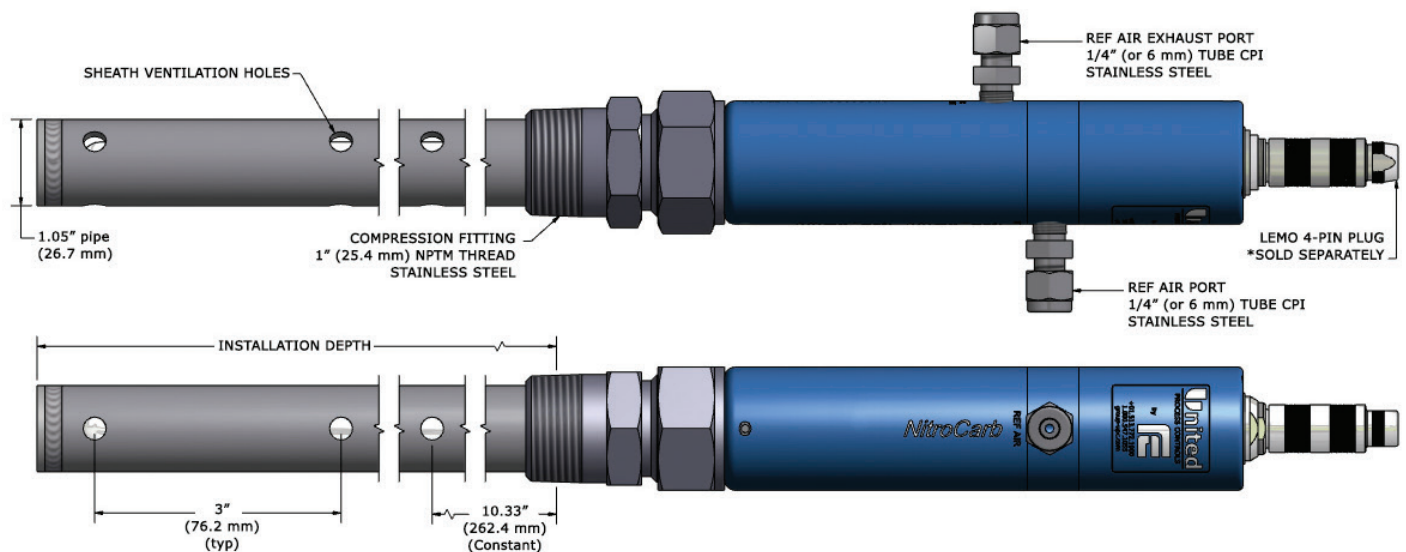


UPC·MARATHON


A NITREX COMPANY

NITROCARB™

VACUUM-TIGHT OXYGEN SENSOR FOR NITROCARBURIZING PROCESSES

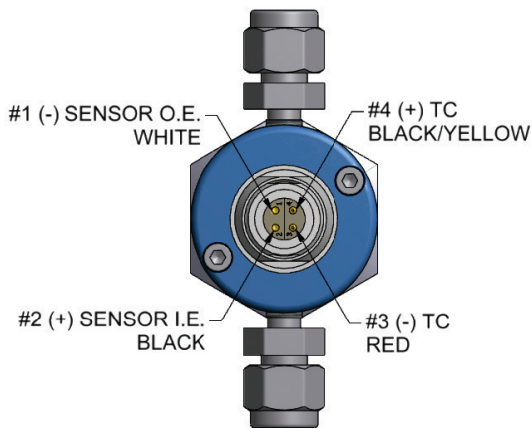

A cable assembly is required for first-time installations. To order, please consult the table below.



ORDER CODE	AA6	-	-	-
LENGTH				
20" / 50.8 cm	20			
26" / 66.0 cm	26			
32" / 81.3 cm	32			
38" / 96.5 cm	38			
T/C TYPE				
Thermocouple Type K				K
Thermocouple Type R				R
Thermocouple Type S				S
No Thermocouple				X
CONNECTION FITTINGS				
6 mm Tube, CPI Ferrules				8
1/4" Tube, CPI Ferrules				9

ORDER CODE	CA6	-	-	-
LENGTH				
1' / 30.5 cm	01			
10' / 304.8 cm	10			
20' / 609.6 cm	20			
50' / 1524.0 cm	50			
T/C TYPE				
Thermocouple Type K				K
Thermocouple Type R & S				RS
No Thermocouple				X

USA

+1 414 462 8200
sales.na@upc-marathon.com

CANADA

+1 514 335 7191
sales.na@upc-marathon.com

CHINA

+86 21 3463 0376
sales@mmichina.cn

FRANCE

+33 3 81 48 37 37
sales.fr@upc-marathon.com

GERMANY

+49 7161 94888 0
sales.de@upc-marathon.com

POLAND

+48 32 296 66 30
sales.pl@upc-marathon.com